

## Part Manuals

### How to Install Springs on a 42" Swivel Mechanism

#### Tools Needed



Electric Drill



Putty Knife



Phillips  
Screwdriver



Flathead  
Screwdriver


#### *Step One* Remove bracket screws & pivot assembly

Lower board to normal ironing position. Locate brackets inside cabinet on both sides. Remove lower two screws from both sides. Gently pivot one side of the assembly up and out of cabinet about 4".



#### *Step Two* Pry off axle rod & install springs.

Gently pull axle rod from bracket, as shown. Place the spring on the axle rod, slide over, and then insert the rod back into the brackets.

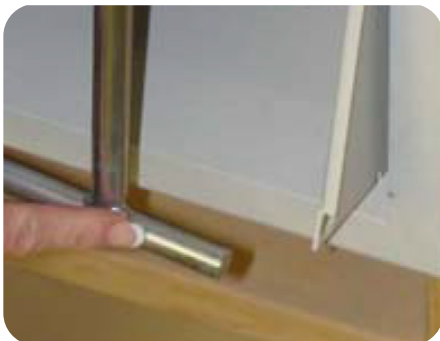




Make sure prong of spring is in slotted position of bracket.

### *Step Three* Re-install bracket screws & cock springs into position

Pivot assembly bracket back into cabinet to its original position, and then re-insert screws as shown below. Next, place the end of a flathead screwdriver into the "U" shape on the spring. With a putty knife between the screwdriver and the cabinet frame, cock springs into place on rod. Perform this step on both springs.

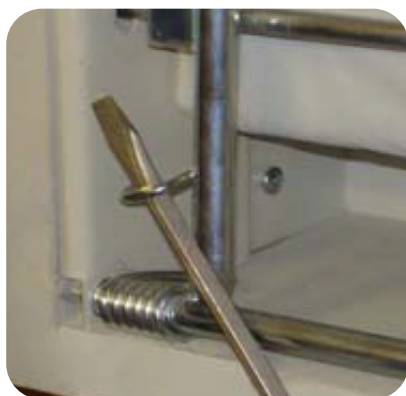

### *Optional* Remove retainer bar

The retainer bar is no longer needed and can be removed if desired. Remove and fill holes with putty. If needed, a touch-up paint kit is available to cover any paint irregularities.

*Installation Complete!*

